STONE CRUSHERS

RSM

The stone crusher for difficult tasks.

RSM models are designed to crush slabs of rock and stones up to 20 in in diameter and 16 in deep. They work with 200-360 hp tractors and have a working width of 80-90 in. FAE's RSM line is made for difficult farmland clearing work in places where large rocks and stones need to be cleared to prepare the field for agricultural use.

Its wide opening guides large material towards the rotor and helps maintain consistently high performance when working the soil. An adjustable counterblade makes it possible to crush material to the desired fineness.

200-360 hp

Ø 20 in max (stones)

Depth 16 in






Structural frame in steel
maximum strength and durability
in heavy duty operations



Interchangeable
Hardox® anti wear plates
quick and easy maintenance



Oil-cooling system
for side gears
greater efficiency and lifespan
(optional for RSM)

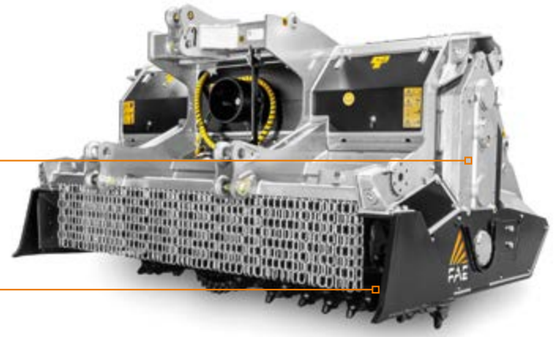

Wide opening
to efficiently process more material

MAIN OPTIONS



Rear hood grill
allows larger material to be
held back and crushed again
for optimum results



Adjustable steel
dosing blade
perfect distribution
of the crushed material



Hydraulic top link
for an optimal working
depth control



Steel dosing blades with
spring system
excellent even distribution of
material and precompaction

STANDARD EQUIPMENT

Hydraulic rear hood	Friction clutches
Interchangeable inner antiwear plates in Hardox®	PTO shaft with cam clutch (RSM)
Enclosed machine body	PTO shaft (RSM/HP)
Inside lateral protection	Bolted-on rotor shafts (in forged steel)
Protection chains	Adjustable Hardox® counter-blade
Transmission with side gearbox	Penetration skids
Gearbox with freewheel	Side gearboxes with oil cooling system (RSM/HP)

OPTIONS

Bolted grid on rear hood	Dozing blade
Multiple tooth options	Dozing blades with spring system
Hydraulic top link	Side gearbox with oil cooling system (RSM)
IVT - CVT or creeper transmission mandatory	Forestry tires and carrier belly pan strongly recommended

MODEL		RSM-200	RSM-225	RSM/HP-200	RSM/HP-225
	Engine (hp)	200-300	220-300	300-360	300-360
	PTO (rpm)	1000	1000	1000	1000
	Working width (in)	82	91	82	91
	Total width (in)	98	107	98	107
	Weight (lbs)	11155	12103	11155	12103
ROTOR G/3	**Rotor diameter** (in)	37	37	37	37
	Working depht (Max. 1-Max. 2) (in)	10-16	10-16	10-16	10-16
ROTOR R	**R rotor diameter** (in)	36	36	36	36
	Working depht (Max. 1-Max. 2) (in)	9-16	9-16	9-16	9-16
	Max shredding diameter (in)	20	20	20	20
	No. teeth/picks type G/3+STC/3/FP+STC/FP	94+4+4	106+4+4	94+4+4	106+4+4
	type R/65+R/65/HD+STC/3/FP+STC/FP	126+20+4+4	144+20+4+4	126+20+4+4	144+20+4+4

Max. 1: with rotor only Max. 2: maximum depth (maximum working depth depending on ground conditions).
Data refers to machine as standard set-up. Options may have reflects on weights and dimensions. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE G



TOOTH G/3
(standard)



TOOTH G/3/HD
(option)

ROTOR TYPE R



PICK R/65
(option)



PICK R/65/HD
(option)



TOOTH STC/3/FP
(side scraper)



TOOTH STC/FP
(side scraper)